

A perfectly coordinated system

When producing wooden windows, a perfectly coordinated system for sealing window panes and back filling glass retaining strips guarantees that components work well.

OTTOSEAL® S 120

Sealing window panes on windows and doors

OTTOSEAL® A 225

Sealing of frame joints and mitre cuts in metal construction and in wooden windows

OTTO Flexi tape

Glazing tape as per IVD instruction sheet no. 10, 5.2 Glazing systems

OTTO Smoothing Agent

For a perfect application



For information relating to certification marks, please see www.otto-chemie.com under the heading „Information on Certification Marks“. The requirements and test criteria of the DGNB and LEED can be found on www.dgnb.de and www.german-gba.org. Please note that these companies do not evaluate our individual products, but the sustainability as a whole of each complete building project.

The information in the present document corresponds to the status quo on going to print, refer to the index. With a new edition this edition becomes invalid. Due to the many possible influences during and after application, the customer always has to carry out trials first. Please observe the respective technical data sheet! This information is available on the Internet at www.otto-chemie.com. Errors and typographical errors are excepted.

Follow us on Social Media:



@OTTOCHEMIE

Hermann Otto GmbH

Krankenhausstr. 14
83413 Fridolfing, Germany
Tel.: +49 8684 908-0
info@otto-chemie.com
www.otto-chemie.com



OTTO product information

OTTOSEAL® S 120

The premium glazing silicone

Index: 9999718-GB | 12.10.2023 | © Hermann Otto GmbH 2023

Quality creates cohesion


- ✓ **Streak-free and abrasion-resistant**
- ✓ Resistant to stress at an early stage
- ✓ Laminated safety glass
- ✓ Very long-lasting joint



Crystal clear view

1-component silicone sealant based on alkoxy, neutral cross-linking

for internal and external use



Perfectly suited for sealing window panes

The premium glazing silicone OTTOSEAL® S 120 is highly abrasion-resistant and streak-free, tested according to the IFT directive VE-04/2 and therefore ideally suited for sealing window panes on wooden windows. OTTOSEAL® S 120 also contains fungicides making it resistant to mould infestation.



Always achieve the right colour

OTTOSEAL® S 120 is available in many colours, perfectly suiting your design wishes. As a special feature, matte colours are also available. To make the colour selection as simple as possible, OTTO offers high quality and practical colour charts with original colour patterns.



Streak-free and abrasion-resistant



Resistant to stress at an early stage




Laminated safety glass



Very long-lasting joint

**OTTO
SEAL®
S 120**

Schlierenfrei und abriebfest



★★★★★
PREMIUM

Glasfalz-Silikon

Silicone sealant for glazing
Silicone pour les fenêtres
Glasspanning-silicone

- ✓ Früh beanspruchbar
- ✓ Verbund-Sicherheitsglas
- ✓ Sehr langlebige Fuge

OTTO
DICHTEN & KLEBEN

Window pane sealing on wooden windows



Glass, window and metal construction



Sealing double-glazings (e. g. „Profilit“)



Sealing of connection joints on construction elements




Expansion joints on prefabricated concrete and cellular concrete units



The applications at a glance



Window pane sealing on wooden windows

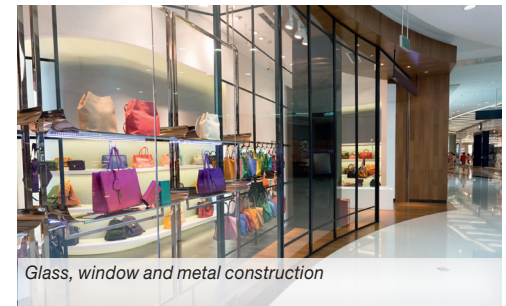

Glass, window and metal construction



Sealing double-glazings (e. g. „Profilit“)



Find out more about OTTOSEAL® S 120

You can find more information about the product on our website www.otto-chemie.com or in the OTTO app.

