

# OTTOSEAL® M 360

## The paintable professional sealant

OTTO product tip!



- ✔ Can be painted over
- ✔ Silicone-free
- ✔ Durable and robust joint
- ✔ RAL assembly

### Applications

- ✔ Building construction joints in accordance with DIN 18540-F
- ✔ Sealing of joints on facades, metal constructions



### The OTTO processor tip

Thanks to the quick shrinkage-free and bubble-free curing of OTTOSEAL® M 360 and OTTOSEAL® M 361, the sealants can already be painted indoors after about 1 hour.

For information relating to certification marks, please see [www.otto-chemie.com](http://www.otto-chemie.com) under the heading „Information on Certification Marks“. The requirements and test criteria of the DGNB and LEED can be found on [www.dgnb.de](http://www.dgnb.de) and [www.german-gba.org](http://www.german-gba.org). Please note that these companies do not evaluate our individual products, but the sustainability as a whole of each complete building project.

The information in the present document corresponds to the status quo on going to print, refer to the index. With a new edition this edition becomes invalid. Due to the many possible influences during and after application, the customer always has to carry out trials first. Please observe the respective technical data sheet! This information is available on the Internet at [www.otto-chemie.com](http://www.otto-chemie.com). Errors and typographical errors are excepted.

**Hermann Otto GmbH**  
Krankenhausstr. 14  
83413 Fridolfing, Germany  
Tel.: +49 8684 908-0  
info@otto-chemie.com  
www.otto-chemie.com



OTTO product information

# OTTOSEAL® M 361

## The structure-hybrid sealant for building joints

Quality creates cohesion

- ✔ Structured look
- ✔ Can be painted over
- ✔ Silicone-free
- ✔ RAL assembly


Index: 9999431-GB | 21.09.2021 | © Hermann Otto GmbH 2021



# The professional sealant with a textured look

## 1-component structured hybrid polymer STP sealant

for indoor and outdoor application




### Sealing with texture

Thanks to the quick shrinkage-free and bubble-free curing, its low residual tack and its paintability, OTTOSEAL® M361 guarantees an optimal result. However, its greatest feature is its granular structure, which makes the sealant adapt perfectly to the facade's plaster structure. The sealant is also ideal for closing cracks and holes in facades and interior walls, such as in scaffolding and paintwork. In addition, the sealant is ideal for connections to structures or for connection joints between windows and facades.



### Sprayable sealant system for RAL assembly

OTTOSEAL® M361 is ideally suited for RAL assembly of windows and door elements. It can also be used for indoor and outdoor sealing.

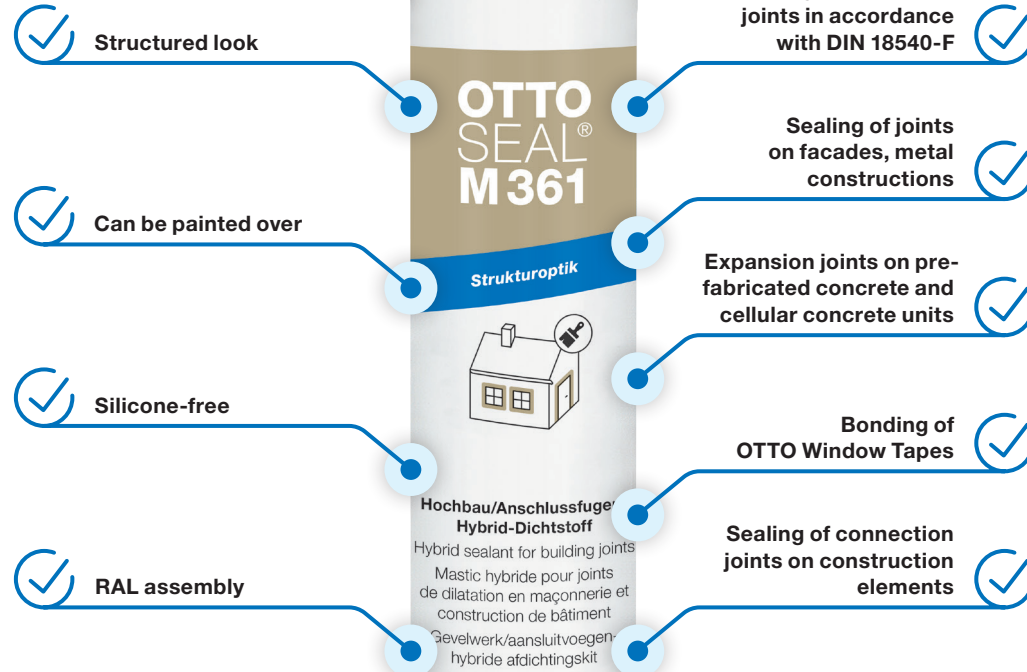

# The applications at a glance



### Find out more about OTTOSEAL® M361

You can find more information about the product on our website [www.otto-chemie.com](http://www.otto-chemie.com) or in the OTTO app.

